

HSF

NOTES:

Current Rating: 2.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C




Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: LCP+30%G.F UL94V-0

Ordering Information

2263 - 4 XX S XX D Y N T X

No of Pins per ROW: 02-40PIN
 Contact Plating: GP=Gold Flash D=LCP T=Tube
 G3=10μr/Gold
 G4=15μr/Gold
 G5=30μr/Gold
 S0=Gold Flash/Tin
 S3=10μr/Gold/Tin
 S4=15μr/Gold/Tin
 S5=30μr/Gold/Tin
 SN=Tin
 SM=Mate Tin

Item	Pitch	DIM A	Mating
Standard	2.00	3.1/2.4	1215/1220
Alternate			

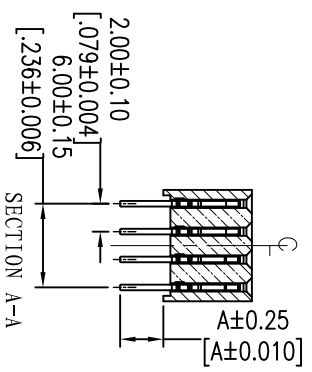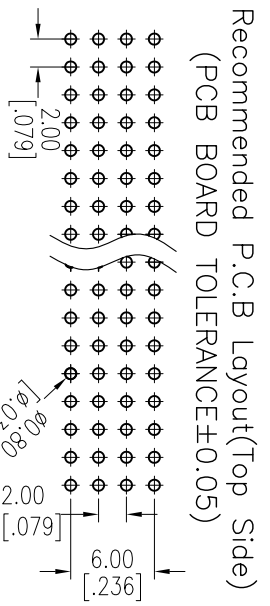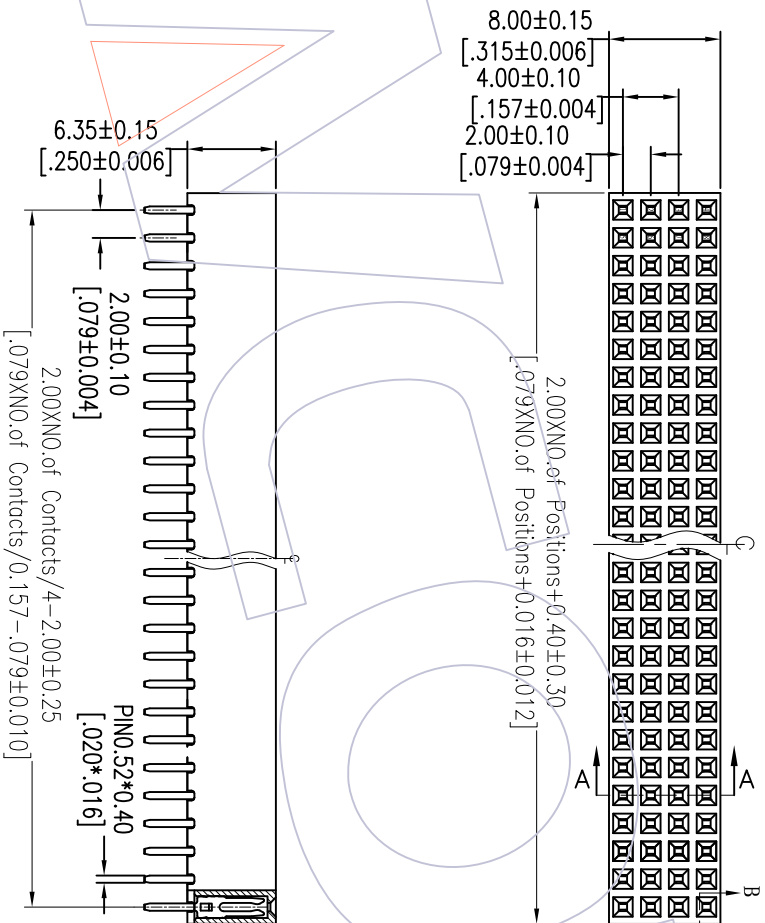

SECTION B-B

OPERATION		DRAW		DATE		SCALE		PART NO.	
XX	±0.40	Wang		2013/04/26	FIT	mm	UNIT	2263-4XXXXDYNTX	
XX	±0.25	CHECK		DATE	A4	mm	SIZE	TITLE:	
XXXX	±0.15			DATE	1/1	mm	SHEET	FH2.0mm FOUR ROW 180° DIP	
ANGLE	± 3'	APPROVE		DATE	PROJ.			Customer NO.	
DIM	TOL								
WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com					WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com				