







NOTES:
 Current Rating:18A
 Voltage Rating:300V
 Contact Resistance:8millohm Max
 Withstand Voltage:AC2000V
 Insulation Resistance:1000Megaohm Min
 Screw Torque: 4.4 lb·in
 Wire range: 12-30AWG
 Operation Temperature:-40℃ to +105℃

Housing Material:PA66 UL94V-0
 Cover Material:PA66 UL94-V0
 Screw:Steel
 Pin Block:Brass
 Contact:Phosphor Bronze



Ordering Information:

P F 508 - A XX A SM W 1
 I=Female Pitch No.of Pins Color Contact Plated Type
 508=5.08 02-24P A=Green SM=Male Tin W=White Screw

13P	76.20 ±0.30	60.96 ±0.30			
12P	71.12 ±0.30	55.88 ±0.30	24P	132.08 ±0.50	116.84 ±0.50
11P	66.04 ±0.30	50.80 ±0.30	23P	127.00 ±0.50	111.76 ±0.50
10P	60.96 ±0.30	45.72 ±0.30	22P	121.92 ±0.50	106.68 ±0.50
9P	55.88 ±0.30	40.64 ±0.30	21P	116.84 ±0.50	101.60 ±0.50
8P	50.80 ±0.30	35.56 ±0.30	20P	111.76 ±0.50	96.52 ±0.50
7P	45.72 ±0.20	30.48 ±0.20	19P	106.68 ±0.40	91.44 ±0.40
6P	40.64 ±0.20	25.40 ±0.20	18P	101.60 ±0.40	86.36 ±0.40
5P	35.56 ±0.20	20.32 ±0.20	17P	96.52 ±0.40	81.28 ±0.40
4P	30.48 ±0.20	15.24 ±0.20	16P	91.44 ±0.40	76.20 ±0.40
3P	25.40 ±0.20	10.16 ±0.20	15P	86.36 ±0.40	71.12 ±0.40
2P	20.32 ±0.20	5.08 ±0.10	14P	81.28 ±0.40	66.04 ±0.40
位数	A	B	位数	A	B

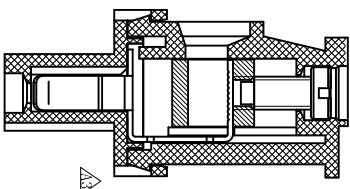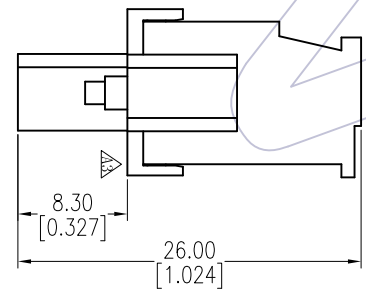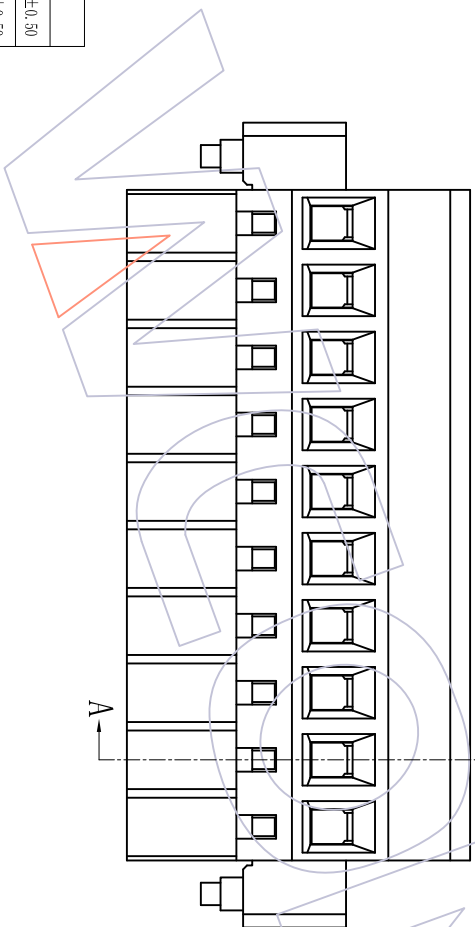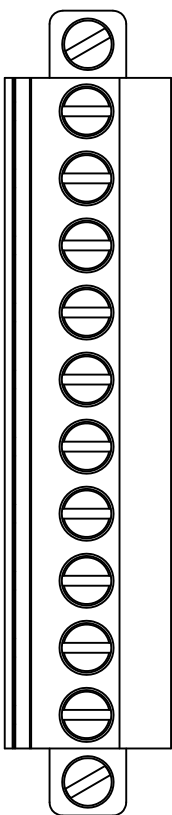

Section A-A

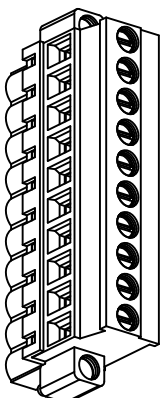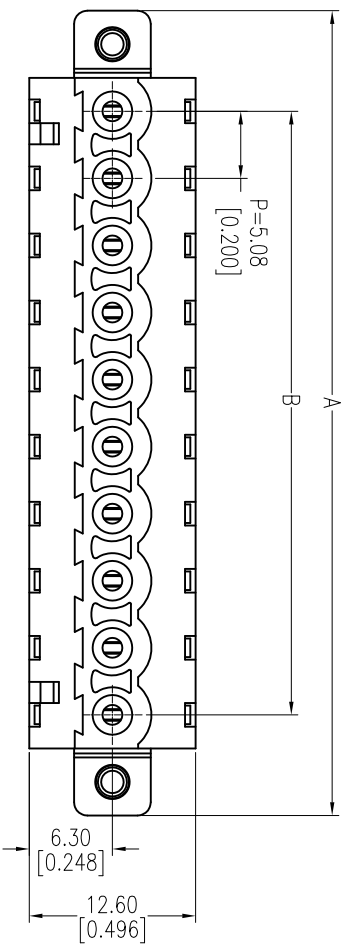

A3	2015/12/15	Modify	△	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE: 5.08mm Pitch Female Pluggable Terminal Blocks Customer NO.	WCON-Dongguan Http: www.wcon.com WCON-Kunshan Tel: +86 769 85358920 Tel: +86 512 57468408 Fax: +86 769 85358915 Fax: +86 512 57468408 E-mail: sales@wcon.com E-mail: sales@wcon.com
A2	2015/07/15	Modify	△	XX ±0.40	JYHuang	2015/12/15	mm inch	A4	PF508-AXXASMW1△		
A1	2012/05/17	MODIFY	△	XXX ±0.25	CHECK	DATE	SIZE	A4			
A0	2011/06/08	NEW	—	XXXX ±0.15	APPROVE	DATE	SHEET	1/1			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle ± 3°	APPROVE	DATE	PROJ.				
1				DIM TOL							
2											
3											
4											
5											
6											
7											
8											
9											
10											



WCON-Dongguan
 Http: www.wcon.com
 WCON-Kunshan
 Tel: +86 769 85358920
 Tel: +86 512 57468408
 Fax: +86 769 85358915
 Fax: +86 512 57468408
 E-mail: sales@wcon.com
 E-mail: sales@wcon.com