
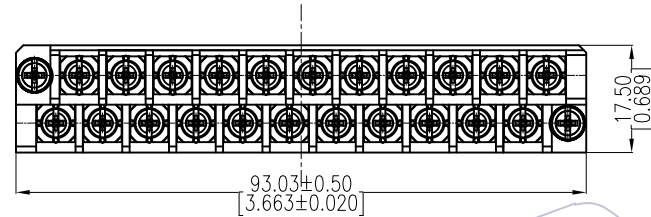


HSF

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

NOTES:





1. Body material: PBT+G.F, UL94 V-0
2. Contact material: Phosphor bronze, Plated: Gold Flash/Ni
3. Pin material: Brass, Plated: Gold Flash
4. Screw material: Steel, Ni Plated
5. Rated Voltage: 300V
6. Rated Current: 10A
7. Wire Range: 14-22AWG
8. Screw Torque: 7.0 lbf.in
9. Contact Resistance: 8mΩ Max
10. Insulation Resistance: DC 1000V 1000MΩ Min
11. Power-Frequency Withstand Voltage: AC 2500V/1min
12. Impulse Withstand Voltage: 3000V
13. Operation Temperature: -40°C to +120°C

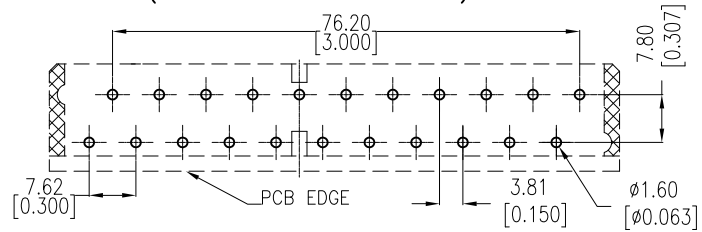

Ordering Information:

BH762 - 01 - 11 - G - G0 - S01

△ No. Pin Per Row: 11P
Color: G=Grey
Contact Plated: G0=Gold Flash

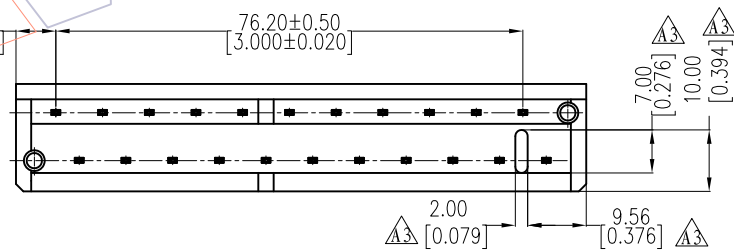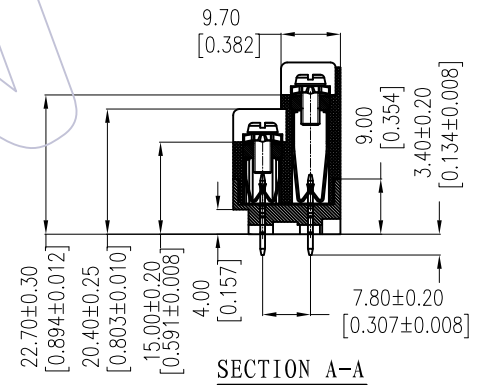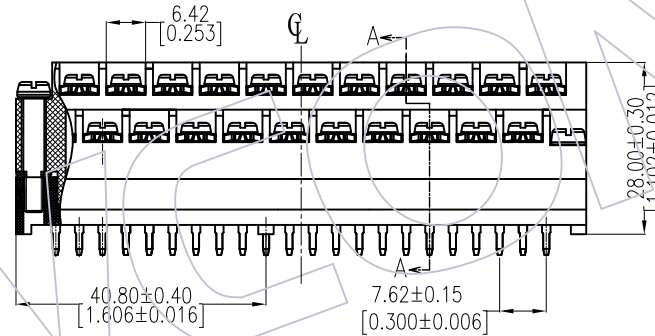

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A3	2014/11/17	Modify	△	OPERATION	Allen	2014/11/17	UNIT	mm	BH762-01-11-G-G0-S01 △
A2	2013/09/23	Modify	△	X.X ±0.40	CHECK	DATE	SIZE	inch	
A1	2013/02/26	Modify The Part NO.	△	X.XX ±0.25	APPROVE	DATE	SHEET	1/1	TITLE: 7.62*7.80mm, Double-Row, W=17.5mm, H=28.0mm, 2*11Pin Barrier Terminal Blocks
A0	2012/07/09	NEW	—	X.XXX ±0.15	DATE	PROJ.	Customer NO.		
				Angle ± 3'					
				DIM TOL					



Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--