

HSF




NOTES:

Rated Current:18.0 AMP
 Contact Resistance:8.0 milliohm Max
 Withstand Voltage:2000 V AC/DC
 Insulation Resistance:1000 Megohm min
 Operation Temperature:−40°C to +105°C
 Housing Material:PA66+30%GF(UL94V−0)
 Contact Material:Brass
 Terminal Plating:
 Matte Tin Plated Over Nickel

Ordering Information:

P M 750- 1 R XX A SM 1

M=Male Pitch 750=7.50 No. of Pins 02-20P Color A=Green SM=Male Tin Contact Plated Series No.

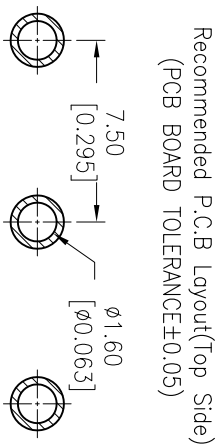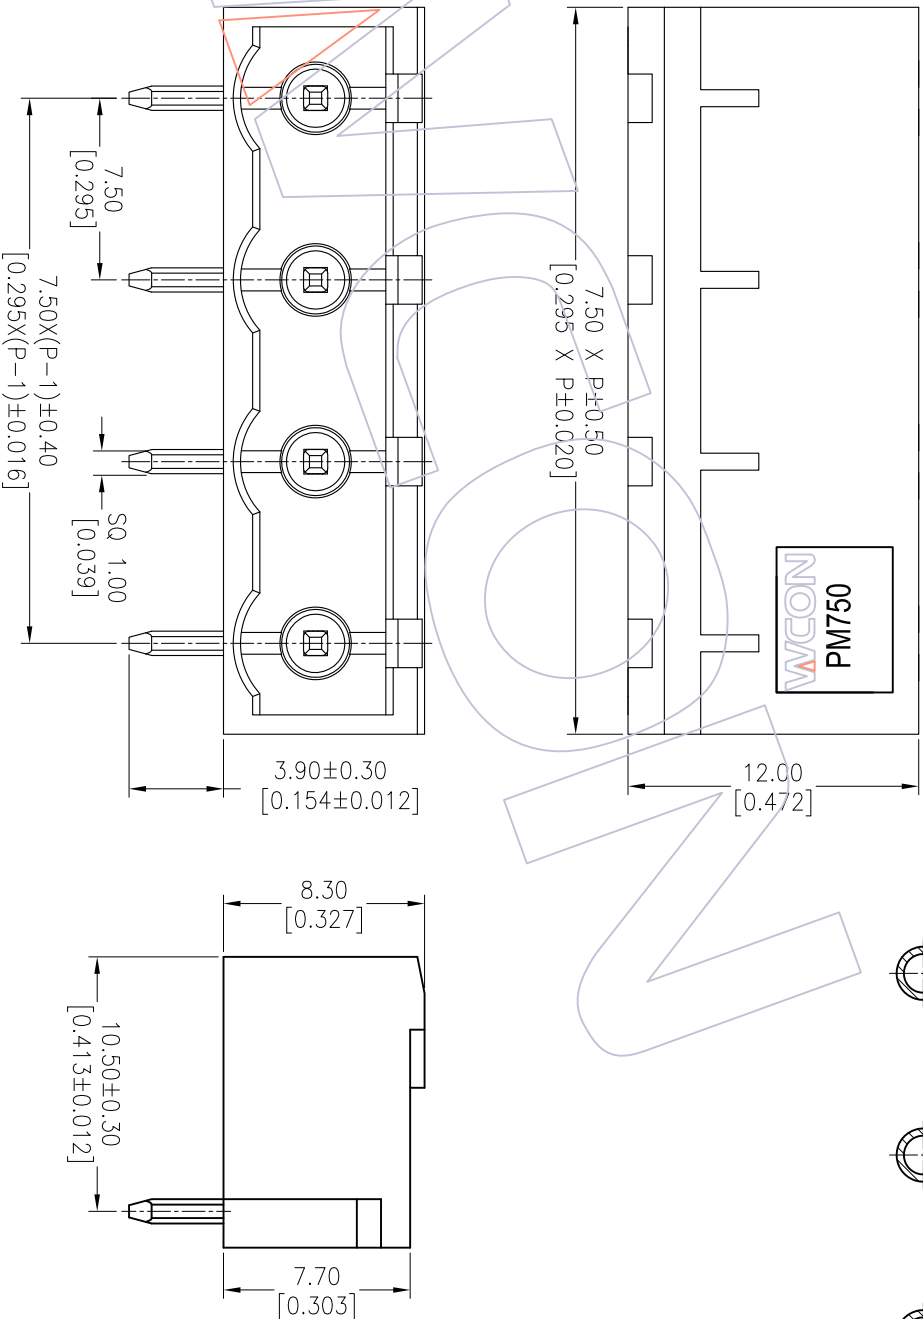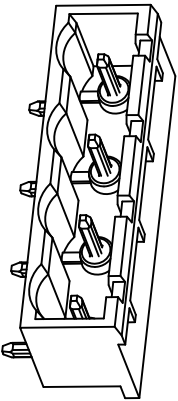

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
A0	2013/11/06	NEW		XX ±0.40	Tsingn	2013/11/06	mm A4	inch 1/1	PM750-1RXXASMI	7.50mm Pitch Male Pluggable Terminal Blocks	Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
				XXX ±0.25	CHECK	DATE	UNIT	SIZE				
				XXX ±0.15	APPROVE	DATE	SHEET	PROJ.				
				Angle ± 3'								
				DIM	TOL							



Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com