

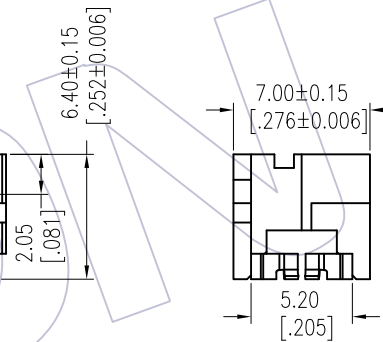
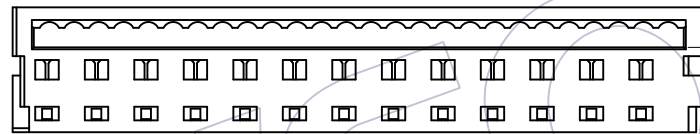


HSF

NOTES:

Current Rating: 1.2AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Sn over Ni
 Insulator Material: PBT+30%G.F UL94V-0


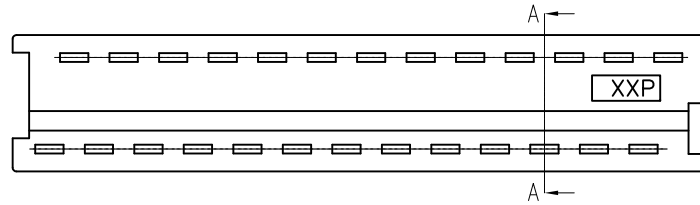


Section A-A

Ordering Information

3901-XX FI XX A N W X 1

No. of Pins	Contact Plating	Insulator Color	Packing
04 16	SN=Tin	A=PBT	W=White T=Tube
06 18			
08 20			
10 22			
12 24			
14 26			

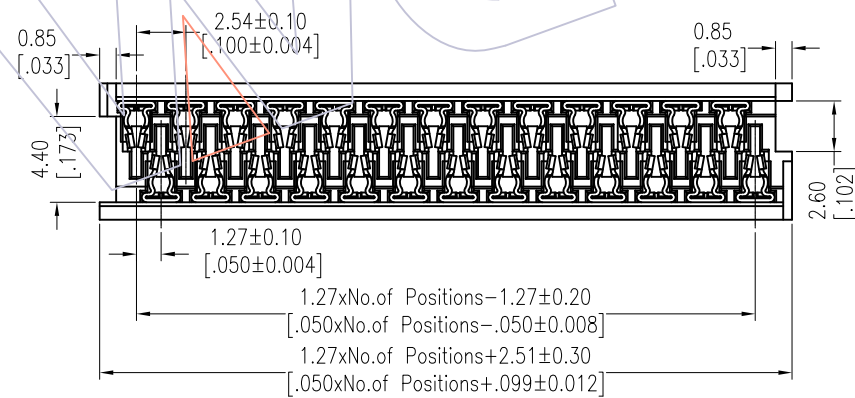

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
				x.x ±0.40	Ding	2018/05/15	UNIT	mm	3901-XXFIXXANWX1
A1	2018/05/15	Picoflex Connector--1.27mm SPC Connector	-----	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE: 1.27mm SPC Connector IDC
AO	2012/11/01	NEW	-----	x.xxx ±0.15		DATE	SHEET	1/1	
				Angle ± 3'	APPROVE	DATE	PROJ.		Customer NO.
				DIM TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
-------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------