



HSF

NOTES:
 Rated Current:0.5 AMP.
 Contact Resistance:25mΩ Max.
 Withstand Voltage:500V
 Insulation Resistance:10000MΩ Min.
 Operation Temperature:-55°C to +125°C

Contact Material:Phosphor Bronze
 Contact Plating: Sn and Au over Ni
 Tail Material: Phosphor Bronze
 Tail Plating: Sn over Ni
 Main Body Material: LCP
 Cover Material:LCP

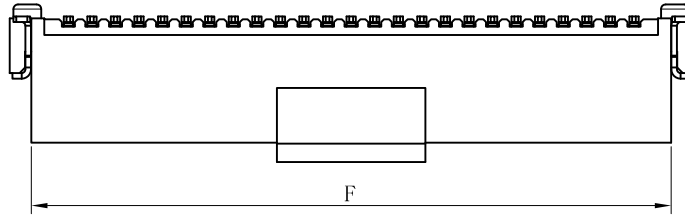

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

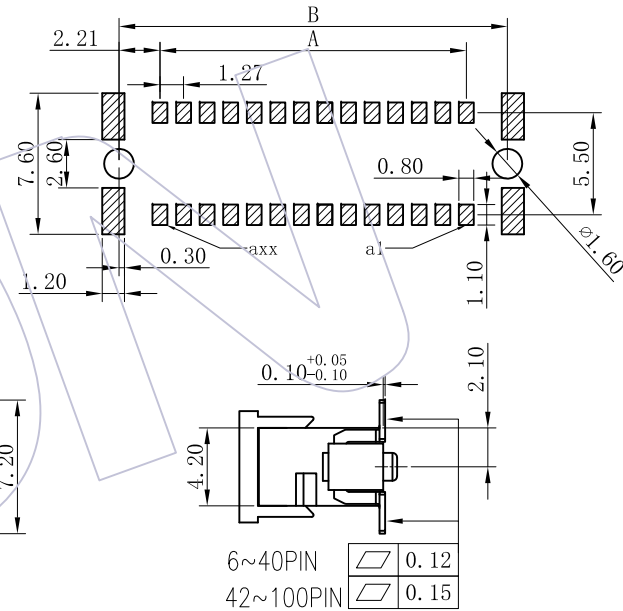


Ordering Information

3910-P XXX - 067 M XX W R 1

No. of Pins
 010: 10 Pin
 020: 20 Pin
 100: 100 Pin

Plating
 S0=Gold Flash/Tin
 S1=3U" Au/Tin
 S3=10U" Au/Tin
 S4=15U" Au/Tin
 S5=30U" Au/Tin

Package
 R: Tape & Reel

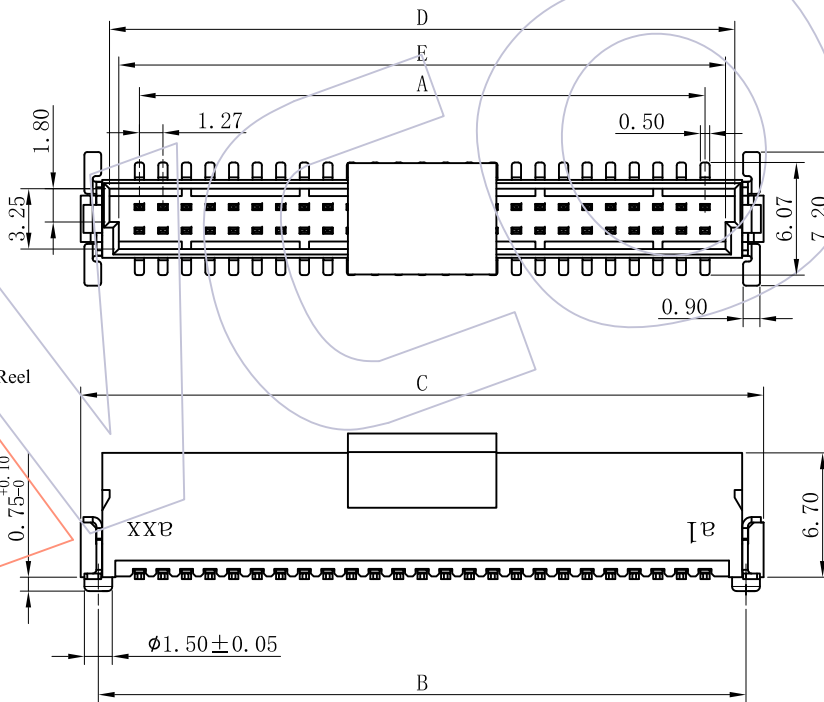

100	62.23	66.65	68.55	65.45	64.45	66.23
90	55.88	60.30	62.20	59.10	58.10	59.88
80	49.53	53.95	55.85	52.75	51.75	53.53
70	43.18	47.60	49.50	46.40	45.40	47.18
60	36.83	41.25	43.15	40.05	39.05	40.83
50	30.48	34.90	36.80	33.70	32.70	34.48
40	24.13	28.55	30.45	27.35	26.35	28.13
30	17.78	22.20	24.10	21.00	20.00	21.78
20	11.43	15.85	17.75	14.65	13.65	15.43
10	5.08	9.50	11.40	8.30	7.30	9.08
PIN	A	B	C	D	E	F

				OPERATION	DRAW	DATE	SCALE	1:1	PART NO.
				x.X ±0.40	Huang	2015.06.02	UNIT	mm	3910-PXXX-067MXXWR1
				x.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
				x.XXX ±0.15			SHEET	1/1	1.27Pitch CONNECTORS SMC
A0	2015.06.02		NEW	Angle ± 3'	APPROVE	DATE	PROJ.		MALE TYPE Q(H=6.70mm)
REV	DATE		MODIFICATION DESCRIPTION	DIM TOL					Customer NO.

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
---	--